

SECTION 25 TOWNSHIP 17 RANGE 4

DATE: 9-12-04

PARTY CHIEF: Wilcoxon

CREW:

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-13-99

IN. S.P.C. E ZONE NAD '83

NAME: 17042504

N: 515446.7540(m)

E: 68665.2120 (m)

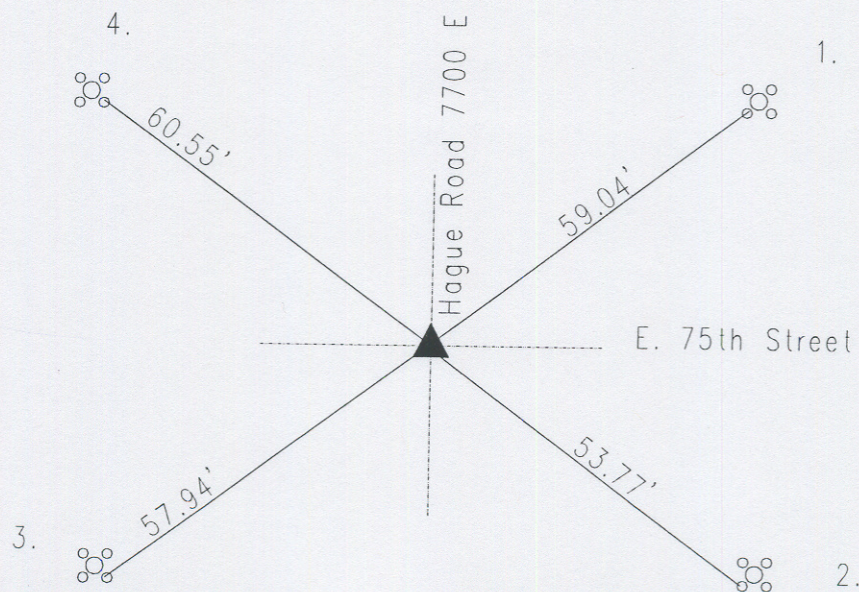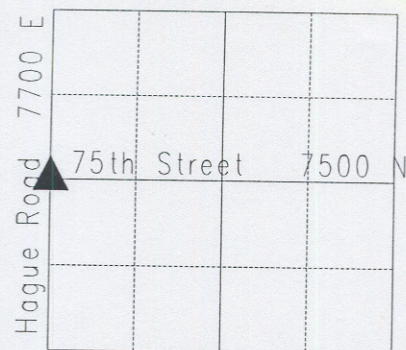

Corner originally set as a post in 1821 by Wm. B. Laughlin with the following witnesses: 12" ash bearing north 88 degrees, thence west 15 links; and a 12" beech bearing south 33 degrees, thence west 27 links. (M.C. Atlas p. 12) A survey by O. W. Voorhies on July 24, 1871 indicates no stone or witnesses. (Lawrence Legal Book p. 31) Corner referenced by Monroe on 5/1/53 and called a stone. Corner referenced by SeFranka on 10/13/70 and called a r.r. spike. Corner referenced by Wilcoxon on 10/29/76 and called a r.r. spike. Corner referenced by Gries on 10/16/87 and called a brass plug. Corner referenced by Wilcoxon on 10/11/93 and called a brass plug. Corner excavated by Wilcoxon on 8/14/95 and a stone was found 13" down under the brass plug. A #205 cast iron Harrison monument was set in position as the corner .

[illegible]